

The Leaders in Portable X-Ray Systems

Rover III System




NOVO Mesh System -
Unmatched Wireless Performance



Top of the Line System in a Rugged Pelican Case

- 22WS Detector- only 6.1 lbs. (2.8kg) with battery
- Wired & wireless operation modes
- 21.5" 1500 NIT battery-operated touch tablet
- 6 hours System Operation at Standard 800 NIT, with optional 1500 NIT upon request
- MIL-DTL 38999 connectors
- Supports multi-tablet control & display
- 50m cable on a rugged reel
- Operates with NOVO Touch Software
- Compatible with XTK

System Overview

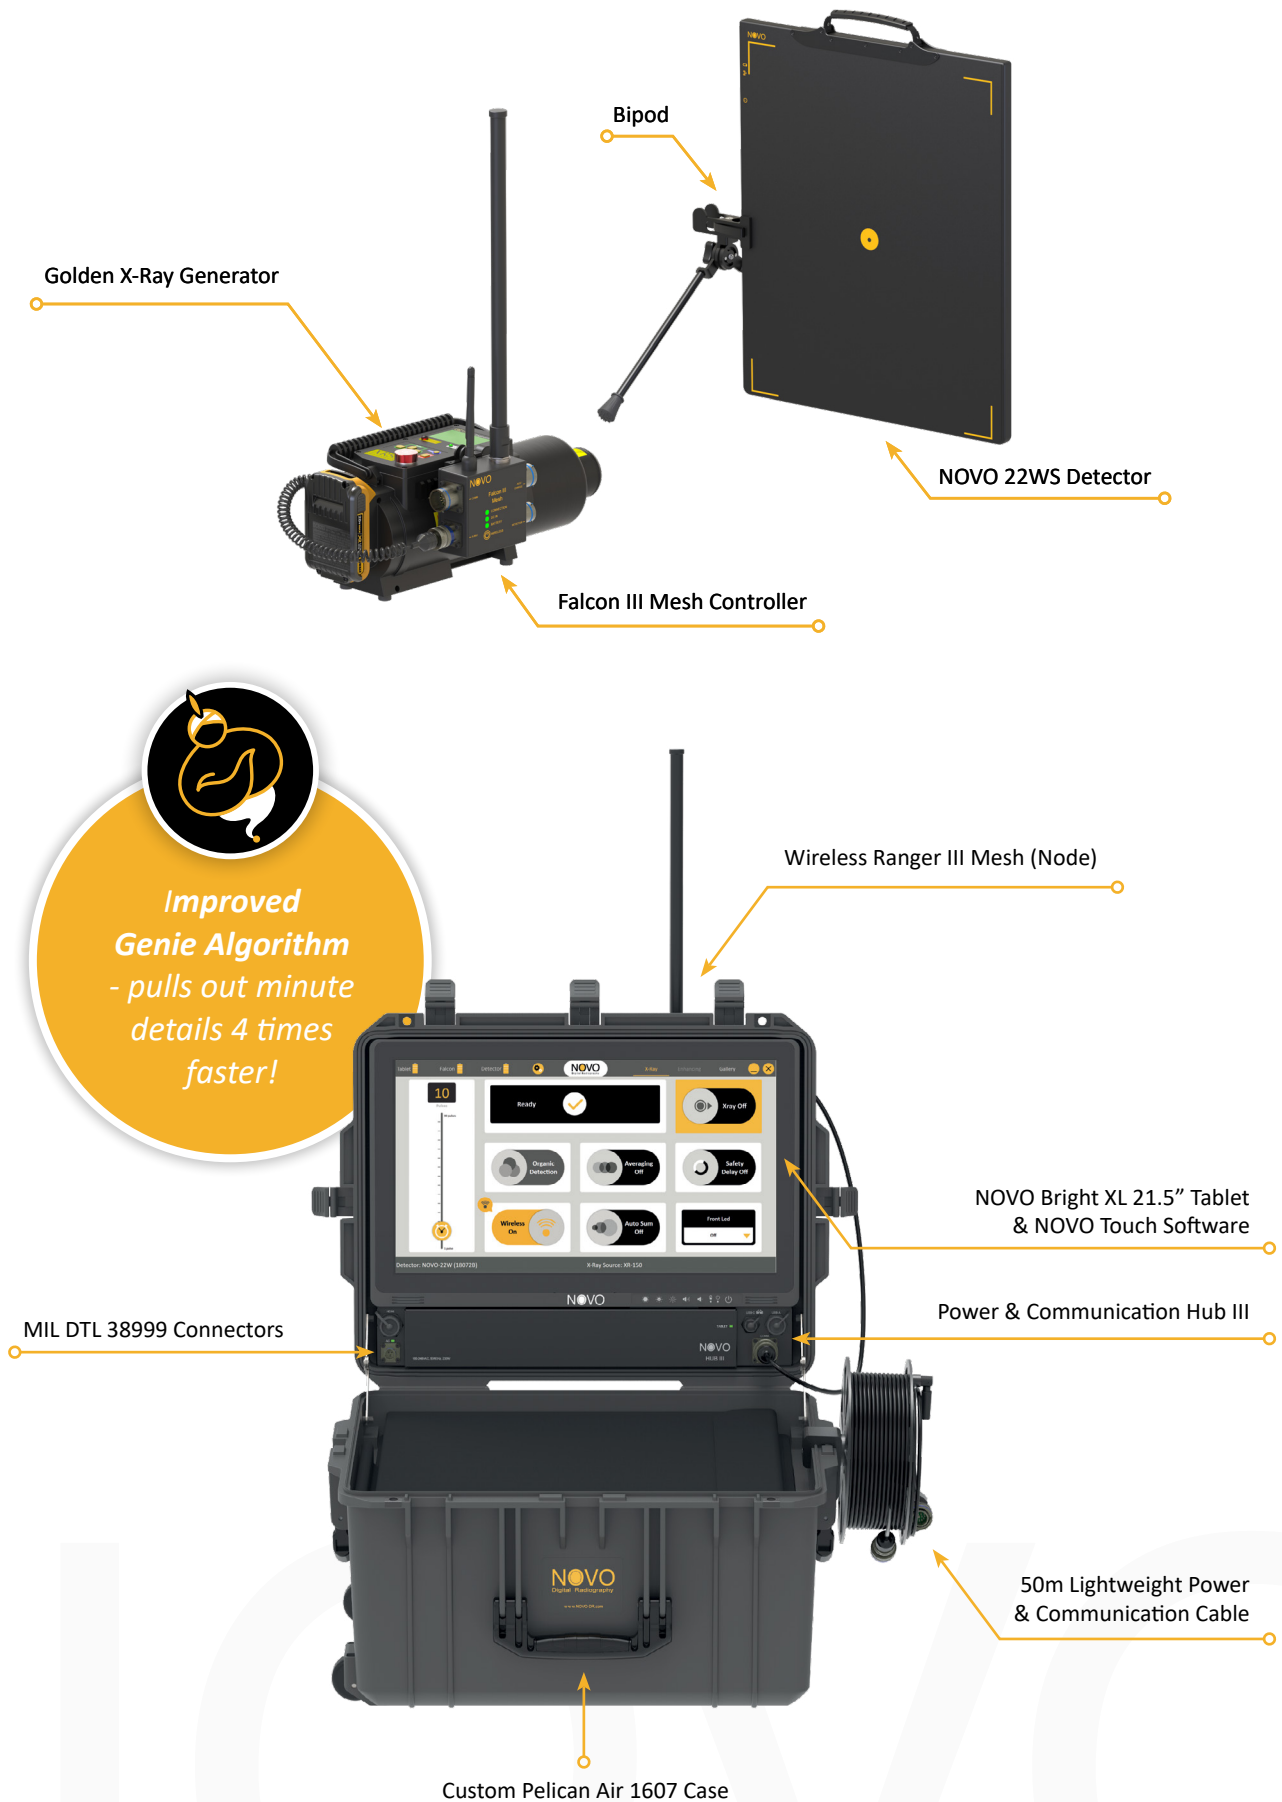




NOVO Wireless Mesh Technology

Unique technology providing unmatched wireless performance:

- Strong signal stability in crowded RF environments, especially ideal for urban scenarios
- Up to 0.6 miles (1000m) LOS between Nodes, longer range when elevating on tripods - up to 1.8 miles (3km)
- Multiple Nodes allow for working "around corners", obstacles and subterranean operations
- Each wireless unit becomes a relay Node, automatically connecting and relaying wireless signals efficiently

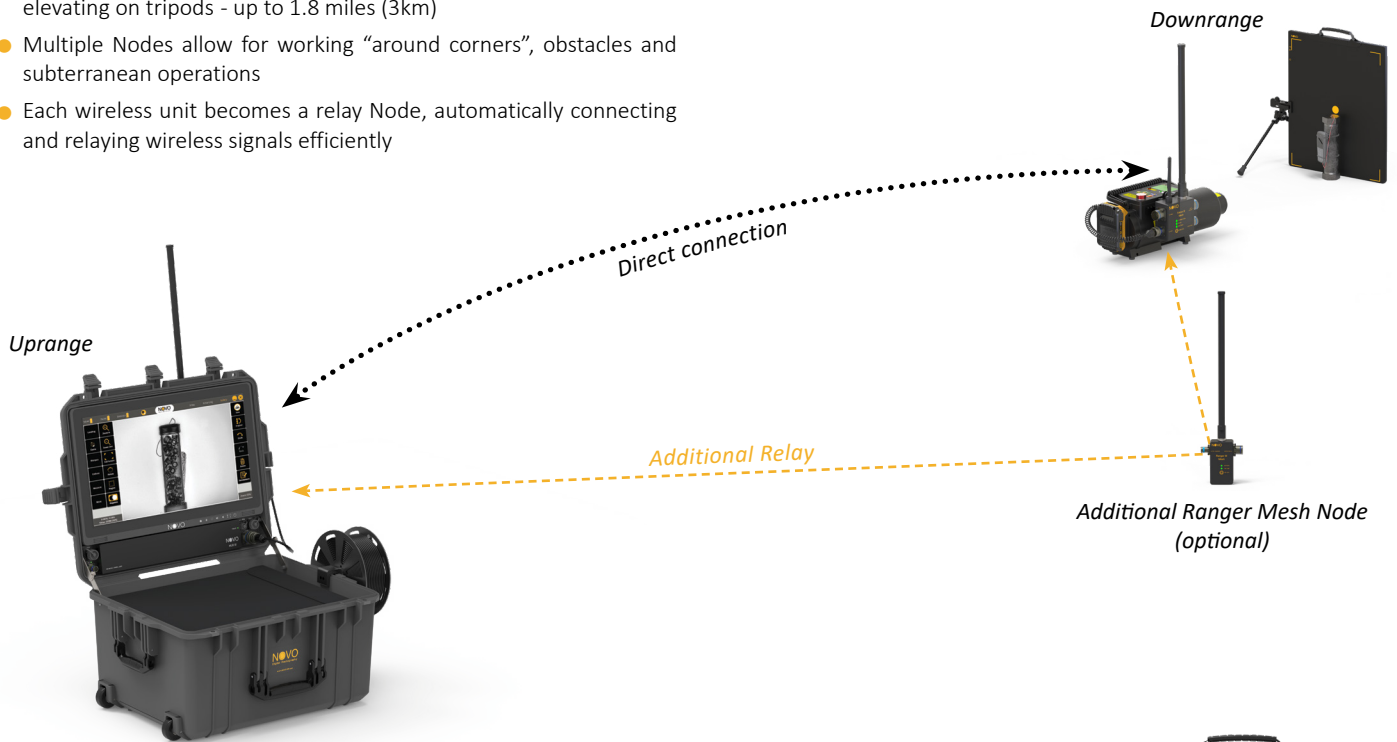


Components


Detector Options



NOVO 12SF
2.2 lbs. (1kg)



NOVO 15WS
3.5 lbs. (1.6kg)



NOVO 22WS
6.1 lbs. (2.8kg)

Detector Model	NOVO 12SF	NOVO 15WS	NOVO 22WS
Steel Penetration *	3.5" (90mm)	3.5" (90mm)	3.5" (90mm)
Detector Weight (Including Battery)	2.2 lbs. (1kg)	3.5 lbs. (1.6kg)	6.1 lbs. (2.8kg)
Detector Load Proof	440 lbs. (200kg)	660 lbs. (300kg)	660 lbs. (300kg)
Detector Imaging Area	6.75" x 10.1" (17.2cm x 25.8cm)	9.1" x 11.2" (23.1cm x 28.4cm)	13.9" x 16.7" (35.5cm x 42.6cm)
Detector Size	7.7" x 11.1" (19.5cm x 28.2cm)	10.6" x 12.9" (26.9cm x 32.9cm)	15.2" x 18.3" (38.5cm x 46.5cm)
Active Area (Imaging Area / Detector Size)	80% Active Area	74% Active Area	85% Active Area
Detector Drop Test	40" (100cm)	40" (100cm)	40" (100cm)
Detector Thickness	0.6" (15mm)	0.6" (15mm)	0.6" (15mm)
Bit Depth	16 bit latest generation	16 bit latest generation	16 bit latest generation
Connector	Magnetic Dual Direction Connector	Magnetic Dual Direction Connector	Magnetic Dual Direction Connector

* Tested with Golden XRS-3 at ~10" (25cm)

Components

Falcon III Mesh Controller

- 2 lbs. (0.9kg)
- Unlimited operation with AC (POE)
- 6 hours Built-in Battery
- Wired/Semi Wired /Wireless Communication
- Supports all Golden Generators
- MIL-DTL 38999 connectors
- Weatherproof
- LED Indications
- Supports Parallel Multi Location Control & Display
- Supports Golden On/Off & battery status info
- Integration module for robots with quick connection



Tablets (Most popular)



	NOVO Bright XL	NOVO Bright L	NOVO Bright S	Panasonic Toughbook® CF-33	Panasonic Toughpad™ FZ-G2	Samsung S22
Screen Size	21.5"	17"	10.1"	12"	10.1"	6.1"
Screen Resolution	1920 x 1080	1920 x 1200	1920 x 1200	2160 x 1440	1920 x 1200	2340 x 1080
Screen Brightness (NIT)	1500 (!) Super Brightness	1500 (!) Super Brightness	1500 (!) Super Brightness	1200	1000	980
Touch Screen	✓	✓	✓	✓	✓	✓
Operating System	Windows 10	Windows 10	Windows 10	Windows 10	Windows 10	Android
Battery Operation Time at 800 NIT	6+ hours	7+ hours	6+ hours	8 hours	5+ hours	10+ hours

*Additional tablets and laptops supported

Power & Communication Hub III

- Provides both power and data communication
- MIL-STD 38999 Connectors
- USB 3.0 Fast Data Ports – USB C, USB A
- Direct HDMI Connection to Bright XL Tablets



Components

X-Ray Generators



	Litex	XR150	XR200	XRS-3	XRS-4
KVP	120	150	150	270	370
Weight	5.6 lbs. (2.5kg)	5.9 lbs. (2.7kg)	10.7 lbs. (4.8kg)	11.8 lbs. (5.3kg)	18.3 lbs. (8.3kg)
Size	11.7" x 3.2" x 4.7" (29.9cm x 8.2cm x 12cm)	10.4" x 3.5" x 4.7" (26.6cm x 9cm x 12.1cm)	10.7" x 4.3" x 5.8" (27.2cm x 10.8cm x 14.8cm)	14.2" x 4.3" x 5.8" (36.1cm x 10.9cm x 14.8cm)	19.3" x 4.8" x 7.1" (48.9cm x 12.2cm x 17.9cm)

**Supports Additional X-Ray Generators*


Accessories



Supporting NOVO Mesh Technology

Folding Slider L

Ideal for screening large objects




Elevated Mode




Folding Slider XXL

Super sized, ideal for screening XXL objects



3D Arc


3D automated imaging with exact X, Y, Z measurements

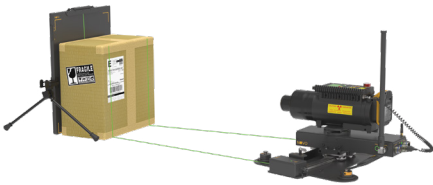

Additional Ranger Mesh Node




Multiple Nodes allow for working "around corners", obstacles and subterranean operations.

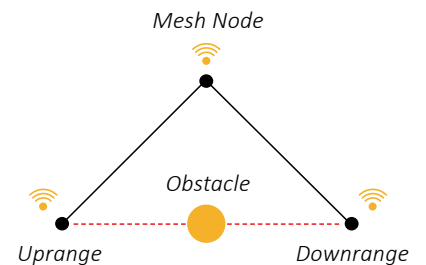

Additional Accessories

3D Arc Lite

Small 3D Imaging with exact X, Y, Z measurements




Extension Cables

Available at 50m, 100m and 150m for a total of 300m



Protective Casing

Armor



Soft Cover



Diagonal Tripod Mount

Firmly holds 12/15/22" detectors and provides various positioning options



Lookout

Organic detection, live Video & Audio




Robot C-Arm

Detector and X-Ray Holder



Robot Detector Frame

Lightweight, shock absorbing



Compatible with the XTK® Software

For detailed information, please review the [EOD & Special Forces Accessories](#) and [Robot Accessories](#) brochures.